

Document ID: 4375667

Body Emblem Package Installation

Installation Instructions Part Number

84023565

Kit Contents

Qty	Description
2	Emblem (Door) - "MALIBU"
1	Emblem (Rear) - "MALIBU 2.0T"
1	Emblem (Rear) - "LT"
4	Alcohol Wipes
1	Installation Instructions

Tools Required

Masking Tape

Before you start

Note: For the emblem to adhere best, the vehicle's mating surface (doors, rear compartment, etc.) should be free of damage (dents, scratches, creases, fractures, etc.).

Caution: Use a plastic, flat-bladed tool to prevent paint damage when removing an emblem/name plate.


1. The part and surface should be 21°C (70°F) prior to installation. The vehicle should remain 21°C (70°F) for one hour after assembly to allow adhesive to develop sufficient bond strength.
2. Wash the vehicle mating surfaces (doors, decklid, etc.) with a non-petroleum based cleaning product. If a stronger cleaner is required to remove any contaminants, use 3M general purpose Adhesive Cleaner (P/N 08984). Then, thoroughly dry with a soft clean cloth.

Procedure


Caution: Only install black badges as a direct replacement of the existing vehicle content. For example, if a customer with an "LS" vehicle has black nameplates installed, only install the "MALIBU" (doors) and "MALIBU" (rear) badges; do not install the "LT" or "2.0T" portion of badges.

© 2018 General Motors. All rights reserved.

1. Apply masking tape around existing nameplates to be replaced. Tape the left side and the bottom edge of the existing nameplate. This will be the locating feature for the new Accessory emblem.
2. Starting on the passenger side front door, remove the chrome "MALIBU" nameplate per Exterior Trim Removal instructions. Ensure all adhesive is removed.
3. Using the supplied alcohol wipe, wipe the area of the door where the emblem will be installed. Wipe surface dry with a clean lint-free towel.
4. Take one of the "MALIBU" emblems and peel the protective liner from the adhesive backing. Be careful not to touch the tape with hands and do not allow tape to come in contact with dirt or any foreign matter prior to adhesion.
5. **IMPORTANT:** The adhesive will bond quickly to the paint. In the event that the emblem should be mis-aligned after installation, do not attempt to remove the emblem as this will cause paint damage. To avoid mis-alignment, do not drop the emblem into place. Instead, first align the bottom edge of the emblem lettering to the masking tape. Then, toggle the emblem into place.
6. Using the palm of the hand or an applicable roller, firmly apply pressure, to wet out the emblem/name plate to the mating surface to ensure full adhesion of the nameplate is made.
7. Repeat the same procedure for the remaining emblems:

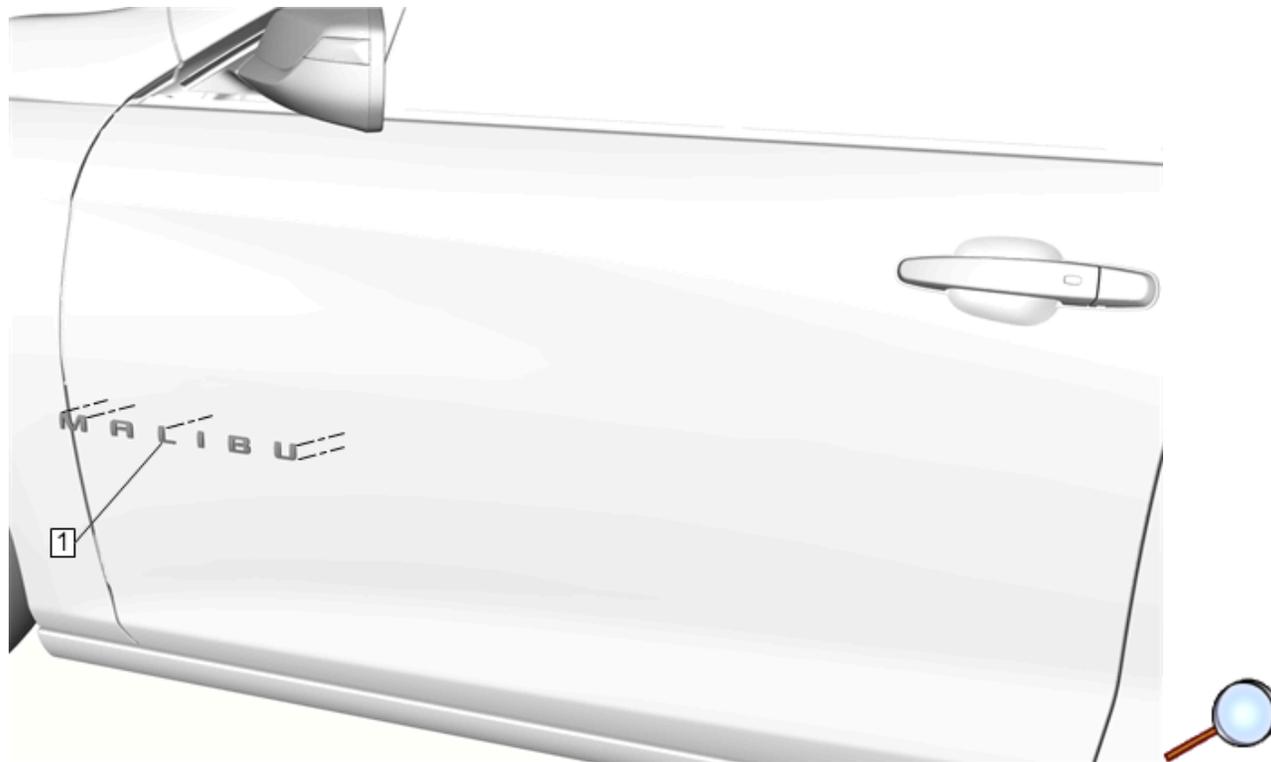

7.1. Drivers' side front door ("MALIBU") (1).

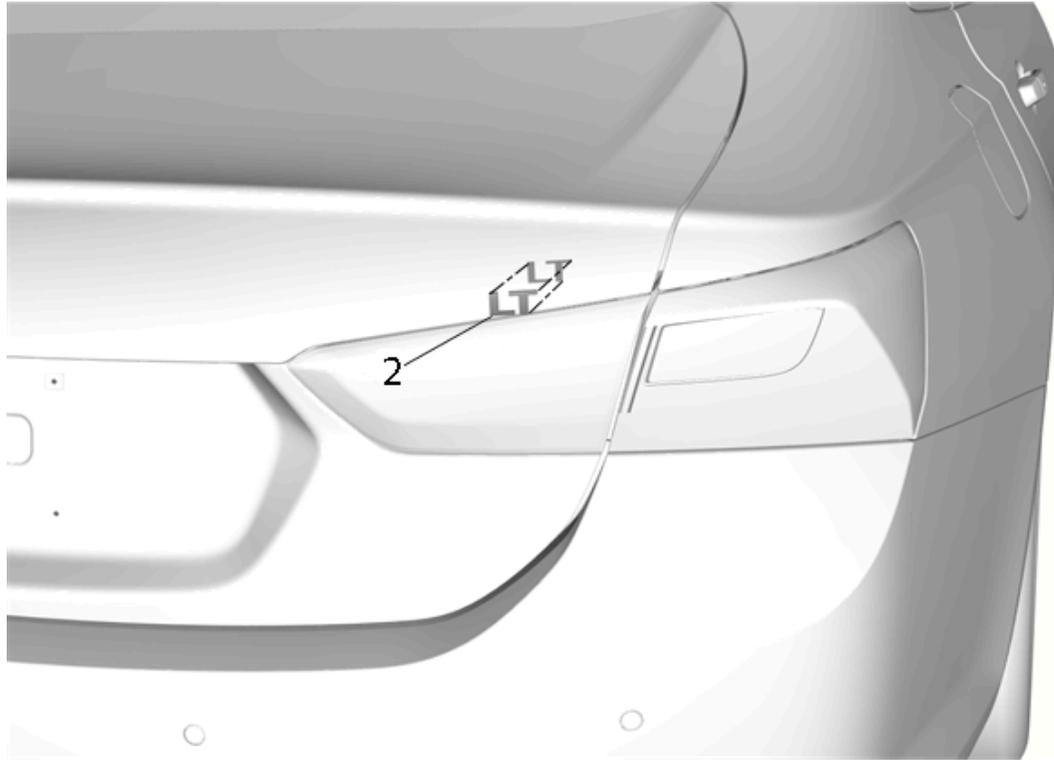

7.2. Rear trim level "LT" (2) if an LT vehicle. If an LS vehicle, remove the chrome LS emblem. If a Premier vehicle, no action for trim level is required.



- 7.3. Rear Malibu 2.0T (3) if a turbo vehicle. If not a turbo vehicle, only install the "MALIBU" section of the badge.
8. The following summarizes the various configurations and installation of the badge package:
- 8.1. **LS Vehicle:** Replace chrome "Malibu" on Passenger and Driver doors with black "Malibu", remove chrome "LS", Remove chrome "Malibu" on decklid and install black "Malibu" portion of black "Malibu 2.0T" badge.
 - 8.2. **LT Vehicle 1.4L or 1.8L engine:** Replace chrome "Malibu" on Passenger and Driver doors with black "Malibu", replace chrome "LT" on decklid with black "LT", remove chrome "Malibu" on decklid and install black "Malibu" portion of black "Malibu 2.0T" badge.
 - 8.3. **LT Vehicle 2.0L engine:** Replace chrome "Malibu" on Passenger and Driver doors with black "Malibu", replace chrome "LT" on decklid with black "LT", remove chrome "Malibu 2.0T" on decklid and install black "Malibu 2.0T" badge.
 - 8.4. **Premier Vehicle 1.4L or 1.8L engine:** Replace chrome "Malibu" on Passenger and Driver doors with black "Malibu", remove chrome "Malibu" on decklid and install black "Malibu" portion of black "Malibu 2.0T" badge. No action with "Premier" badge is required.
 - 8.5. **Premier Vehicle 2.0L engine:** Replace chrome "Malibu" on Passenger and Driver doors with black "Malibu", remove chrome "Malibu 2.0T" on decklid and install black "Malibu 2.0T" badge. No action with "Premier" badge is required.